



ART. 92808.102

Enclosed hose reels with polyurethane hose

Enclosed plastic antishock hose reel with swivelling support s.280 for air-water 20 bar with hose 14 m \varnothing 8 x 12 mm



FLUIDS

ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE | CLEANING DETERGENT

SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | CLEANING | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | CHEMICAL INDUSTRY | MANUFACTURING INDUSTRY | MINING | SHIPPING AND OFFSHORE

Features	UM	Value
Pressure	bar	20
Compatible fluids		air - water 40°C
Environment temperature	°C	-5 ÷ +40
Hose	P/N	971.114
Inlet		G 3/8" (m)
Outlet		G 1/4" (m)
Min/Max hose temperature	°C	-15 ÷ +65
Rewinding clutch		-
Bayonet bracket		-
Packing	N° - m ³	1 - 0,043
Gross weight	kg	6 ÷ 7,9

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

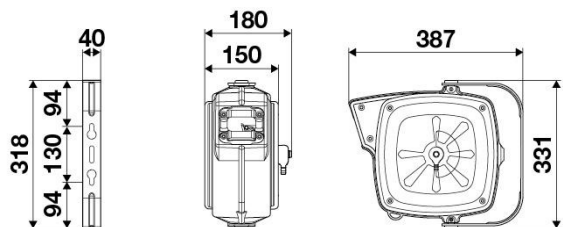

AltecParts
hogedrukonderdelen & accessoires

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.