




ART. 9432.100

Hose reels with ABS drum - s. 430-450-530

Fixed hose reel in ABS and brackets in stainless steel AISI 304, s.430, for air-water, 20 bar, without hose. Inlet-outlet G 1/2" (f)



FLUIDS

FRESH OIL | ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE | A1 JET (FUEL FOR PLANES)

SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | CLEANING | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | CHEMICAL INDUSTRY | MANUFACTURING INDUSTRY | SHIPPING AND OFFSHORE

CERTIFICATIONS

ATEX (ZONE 2) | ATEX (ZONE 22)

Features	UM	Value
Pressure	bar	20
Compatible fluids		air - water
Swivel joint		brass
Seals		Viton®
Characteristic		fixed
Material		AISI 304 stainless steel with ABS drum
Couplings		-
Hose		-
Ø and hose length	Ø - m	-
Inlet		G 1/2" (f)
Outlet		G 1/2" (f)
Reel flow path		brass - AISI 304 stainless steel
Internal drum width	mm	110

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

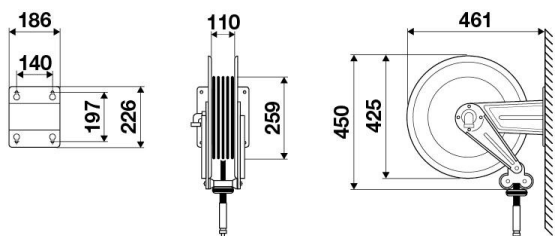

AltecParts
hogedrukonderdelen & accessoires

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.