



# ART. 8522.100

## Stainless steel hose reels - s. 430-530

Swivelling hose reel, stainless steel AISI 304, s.530, for air-water, 20 bar, without hose. Inlet-outlet G 1/2" (f)



### FLUIDS

FRESH OIL | ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE | A1 JET (FUEL FOR PLANES)

### SECTORS

AGRICULTURE | CLEANING | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | CHEMICAL INDUSTRY | MANUFACTURING INDUSTRY | SHIPPING AND OFFSHORE

### CERTIFICATIONS

ATEX (ZONE 2) | ATEX (ZONE 22)

Features	UM	Value
Pressure	bar	20
Compatible fluids		air - water
Swivel joint		brass
Seals		Viton®
Characteristic		swivelling
Material		AISI 304 stainless steel
Couplings		-
Hose		-
Ø and hose length	Ø - m	-
Inlet		G 1/2" (f)
Outlet		G 1/2" (f)
Reel flow path		brass - AISI 304 stainless steel
Internal drum width	mm	104

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

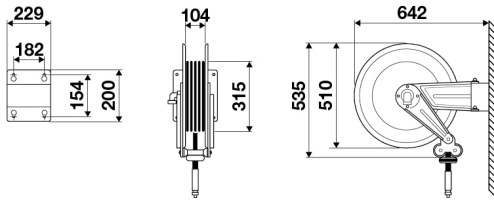

**AltecParts**  
hagedrukonderdelen & accessoires

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.