



# ART. 8540.102

## Hose reels - s. 540-560

Fixed hose reel, s.540, for air-water, 20 bar, with black rubber hose 20 m,  $\varnothing$  3/4"



### FLUIDS

FRESH OIL | ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE

### SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | MANUFACTURING INDUSTRY | MINING

### CERTIFICATIONS

ATEX (ZONE 2) | ATEX (ZONE 22)

Features	UM	Value
Pressure	bar	20
Compatible fluids		air - water
Swivel joint		brass
Seals		Viton®
Characteristic		fixed
Material		painted steel
Couplings		zinc plated steel
Hose		997.220
$\varnothing$ and hose length	$\varnothing$ - m	3/4" - 20
Inlet		G 1" (f)
Outlet		G 3/4" (m)
Reel flow path		brass - zinc plated steel
Internal drum width	mm	165

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

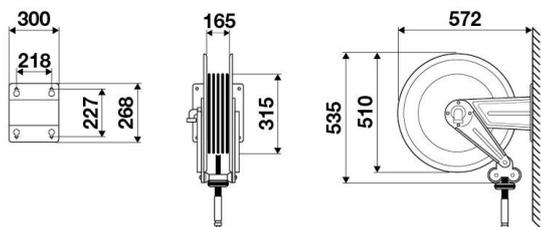

**AltecParts**  
hagedrukonderdelen & accessoires

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.