



# ART. 8540.106

Hose reels - s. 540-560

Fixed hose reel, s.540, for air-water, 20 bar, with with black rubber hose 30 m,  $\varnothing$  1/2"



FLUIDS	FRESH OIL   ANTIFREEZE   AIR   WATER   NITROGEN/INFLATING USE
SECTORS	AERONAUTIC   AGRICULTURE   AUTOMOTIVE   LUBE TRUCK AND INDUSTRIAL VEHICLE   BUILDING INDUSTRY AND ROAD CONSTRUCTION   RAILWAY TRANSPORT   MANUFACTURING INDUSTRY   MINING
CERTIFICATIONS	ATEX (ZONE 2)   ATEX (ZONE 22)

Features	UM	Value
Pressure	bar	20
Compatible fluids		air - water
Swivel joint		brass
Seals		Viton®
Characteristic		fixed
Material		painted steel
Couplings		zinc plated steel
Hose		996.230
$\varnothing$ and hose length	$\varnothing$ - m	1/2" - 30
Inlet		G 1/2" (f)
Outlet		G 1/2" (m)
Reel flow path		brass - zinc plated steel
Internal drum width	mm	165

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

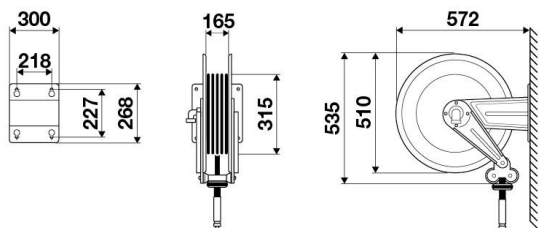

**AltecParts**  
hagedrukonderdelen & accessoires

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.