



ART. 8542.106

Stainless steel hose reels - s. 540-560

Fixed hose reel, stainless steel AISI 304, s.540, for air-water, 20 bar, with black rubber hose 30 m, \varnothing 1/2"



FLUIDS

FRESH OIL | ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE

SECTORS

AGRICULTURE | CLEANING | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | CHEMICAL INDUSTRY | MANUFACTURING INDUSTRY | MINING | SHIPPING AND OFFSHORE

CERTIFICATIONS

ATEX (ZONE 2) | ATEX (ZONE 22)

Features	UM	Value
Pressure	bar	20
Compatible fluids		air - water
Swivel joint		brass
Seals		Viton®
Characteristic		fixed
Material		AISI 304 stainless steel
Couplings		zinc plated steel
Hose		996.230
\varnothing and hose length	\varnothing - m	1/2" - 30
Inlet		G 1/2" (f)
Outlet		G 1/2" (m)
Reel flow path		brass - AISI 304 stainless steel
Internal drum width	mm	165

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

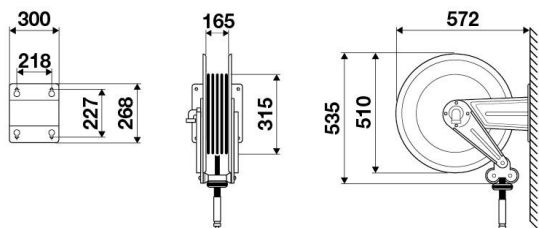

AltecParts
hagedrukonderdelen & accessoires

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.