



ART. 8560.106

Hose reels - s. 540-560

Fixed hose reel, s.560, for air-water, 20 bar, without hose. Inlet-outlet G 1/2" (f)



FLUIDS

FRESH OIL | ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE

SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | MANUFACTURING INDUSTRY | MINING

CERTIFICATIONS

ATEX (ZONE 2) | ATEX (ZONE 22)

| Features | UM | Value |
|---------------------|-------|---------------------------|
| Pressure | bar | 20 |
| Compatible fluids | | air - water |
| Swivel joint | | brass |
| Seals | | Viton® |
| Characteristic | | fixed |
| Material | | painted steel |
| Couplings | | - |
| Hose | | - |
| Ø and hose length | Ø - m | - |
| Inlet | | G 1/2" (f) |
| Outlet | | G 1/2" (f) |
| Reel flow path | | brass - zinc plated steel |
| Internal drum width | mm | 348 |

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

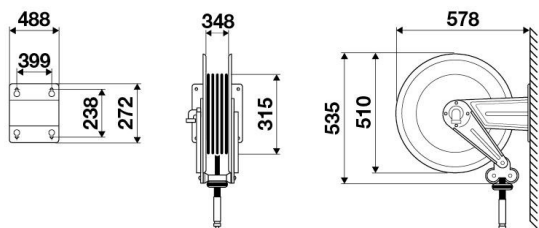

AltecParts
hagedrukonderdelen & accessoires

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.