

- ✓ Available in various designs
- ✓ Multi-functional, suitable for any surfaces
- ✓ Ready to install



FEATURES

Rotor Arms

Can withstand up to 275 bar, and are precision welded and balanced.

2w2 (2 Arms / 2 Nozzles)
Part No. 82.621 (ø150 mm)

2w2 (2 Arms / 2 Nozzles)
Part No. 82.623 (ø250 mm)

2w2 (2 Arms / 2 Nozzles)
Part No. 82.625 (ø350 mm)



Proven Innovation

Developed by Mosmatic and in service for years, the toggle swivel has proven itself. The toggle joint feature allows effortless cleaning of walls and angled surfaces. The movement of the joint is adjustable for fatigue free cleaning.



KDYF Toggle Swivel

Part No. 58.908

Quality Swivel

High rpm stainless steel swivel, features reinforced self lubricated stainless steel ball bearings for improved performance. The dual spring based carbide seal system, guarantees long lasting operation under tough conditions.



DYF Swivel

Part No. 58.000

Stainless Steel Caster


Heavy duty ø60 mm casters with custom mounting brackets ensure easy maneuvering and longevity.



Stainless Steel Caster

Part No. 80.943

Name	Part No.	ø	Weight	Swivel	Rotor Arm	HP- Nozzles	HP- Gun	Lance	Stainless Steel Caster
FL-EB 200	78.200	200	1.9 kg	1x DYF	2x 1/8" NPTF	2x 18.15030	1x	---	---
FL-EG 200	78.210	200	2.4 kg	1x KDYF	2x 1/8" NPTF	2x 18.15030	1x	1x	---
FL-EG 300	78.212	300	3.2 kg	1x KDYF	2x 1/8" NPTF	2x 18.15030	1x	1x	---
FL-ER 300	78.222	300	4.3 kg	1x KDYF	2x 1/8" NPTF	2x 18.15030	1x	1x	3x ø60
FL-EG 410	78.214	410	4.7 kg	1x KDYF	2x 1/8" NPTF	2x 18.15030	1x	1x	---
FL-ER 410	78.224	410	5.9 kg	1x KDYF	2x 1/8" NPTF	2x 18.15030	1x	1x	3x ø60

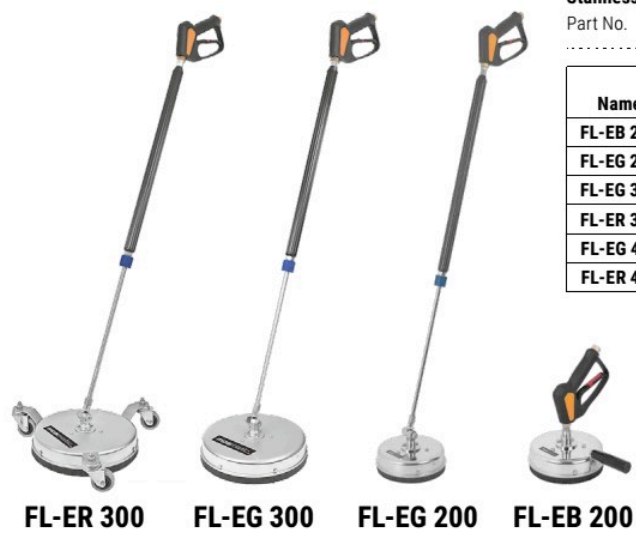

Optional protection plate
See accessories for HP Cleaner

- ✓ Up to 500 bar pressure
- ✓ Available in various designs
- ✓ With ergonomic fork
- ✓ Multi-functional, suitable for any surfaces
- ✓ Ready to install



TECHNICAL DATA

Pressure 275 / 500 bar
Temperature 120°C
Inlet G3/8" F
 G1/4" M



FL-ERG 410

FEATURES

Rotor Arms

Can withstand up to 500 bar, and are precision welded and balanced.

2w2 (2 Arms / 2 Nozzles)

Part No. 82.625 (ø350 mm)

2p2 (2 Arms / 2 Nozzles)

Part No. 82.510 (ø350 mm, 500 bar)



Quality Swivel

High rpm stainless steel swivel, features reinforced self lubricated stainless steel ball bearings for improved performance. The dual spring based carbide seal system, guarantees long lasting operation under tough conditions.



DYF Swivel

Part No. 58.000

Quality Swivel

Stainless steel swivel designed for high pressures and high rpm, featuring reinforced, self lubricated stainless steel ball bearings for enhanced performance. The dual spring based carbide sealing system ensures long lasting operation under demanding conditions.



DYDI Swivel (500 bar)

Part No. 55.263

Stainless Steel Caster

Heavy duty ø60 mm casters with custom mounting brackets ensure easy maneuvering and longevity.



Stainless Steel Caster

Part No. 80.943

Name	Part No.	ø	Weight	Swivel	Rotor Arm	HP- Nozzles	HP- Gun	Fork	Stainless Steel Caster
FL-ERG 410	78.229	410	8.3 kg	1x DYF	2x 1/8" NPTF	2x 18.15030	1x	1x	3x ø60
FL-ERG 410 *	78.337	410	8.6 kg	1x DYDI	2x 1/8" NPTF	---	---	1x	3x ø60

* Pressure: 500 bar / Inlet G1/4" M / HP-Nozzles and HP-Gun available separately



Optional protection plate

See accessories for HP Cleaner